


# LED间隔柱 LED SPACER SUPPORT

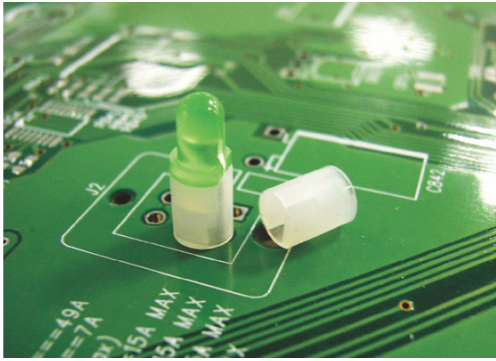

MATERIAL : NYLON 66(UL)



FLAME CLASS : 94V-0,94V-2

COLOR : BLACK,NATURAL

UNIT : mm

用途：用于保护Ø3mmLED立于PC板上，接脚不会弯曲、折断、短路，且使LED高度一致，免用治具，尺寸齐全

1

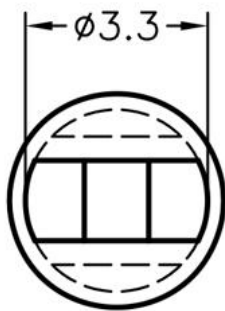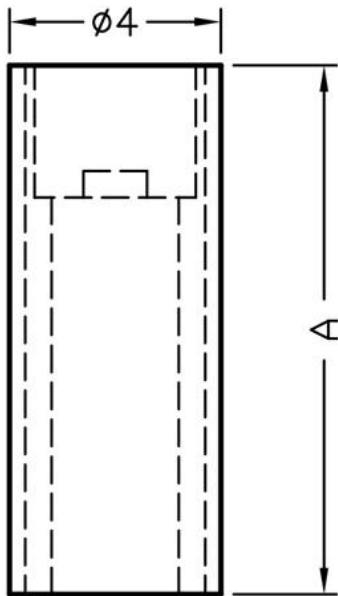

(规格 / 尺寸) 代码说明 :

L : LED建议装配规格 P : 装配灯数

PART NO	A	L	P	PACKAGE
LEDSS-223	4.0	3.0	1	2000
LEDSS-224	4.5	3.0	1	2000
LEDSS-225	5.0	3.0	1	1000
LEDSS-226	5.5	3.0	1	2000
LEDSS-227	6.0	3.0	1	2000
LEDSS-228	6.5	3.0	1	2000
LEDSS-229	7.0	3.0	1	2000
LEDSS-230	7.5	3.0	1	2000
LEDSS-231	8.0	3.0	1	2000
LEDSS-232	8.5	3.0	1	2000
LEDSS-233	9.0	3.0	1	2000
LEDSS-234	9.5	3.0	1	2000
LEDSS-340	9.8	3.0	1	2000
LEDSS-235	10.0	3.0	1	2000
LEDSS-236	10.5	3.0	1	2000
LEDSS-237	11.0	3.0	1	2000
LEDSS-238	11.5	3.0	1	2000
LEDSS-239	12.0	3.0	1	2000
LEDSS-240	12.5	3.0	1	2000
LEDSS-241	13.0	3.0	1	2000
LEDSS-242	13.5	3.0	1	2000
LEDSS-243	14.0	3.0	1	2000
LEDSS-244	14.5	3.0	1	2000
LEDSS-245	15.0	3.0	1	2000
LEDSS-246	15.5	3.0	1	2000
LEDSS-247	16.0	3.0	1	2000
LEDSS-248	16.5	3.0	1	1000
LEDSS-249	17.0	3.0	1	1000
LEDSS-250	17.5	3.0	1	1000
LEDSS-251	18.0	3.0	1	1000
LEDSS-252	18.5	3.0	1	1000
LEDSS-253	19.0	3.0	1	1000
LEDSS-254	19.5	3.0	1	1000
LEDSS-255	20.0	3.0	1	1000
LEDSS-256	20.5	3.0	1	1000
LEDSS-257	21.0	3.0	1	1000
LEDSS-258	21.5	3.0	1	1000
LEDSS-259	22.0	3.0	1	1000
LEDSS-260	22.5	3.0	1	1000
LEDSS-261	23.0	3.0	1	1000
LEDSS-262	23.5	3.0	1	1000
LEDSS-263	24.0	3.0	1	1000